


# T600EX

## 0.6m Ku Band Land Mobile Antenna

- Automatically collect and output carrier position and attitude information
- Storage of more than 10 satellite position parameter
- Terminal One-key start, antenna tracking the satellite automatically
- Polarization direction automatically adjust
- Power-down memory and protection
- Device detection and status checking
- Power-on self test and fault alarming

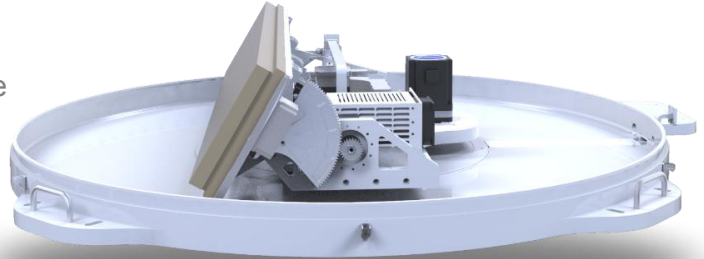

MODEL	T600EX	
Stabilization	2 axis stable and 4 axis tracking	
Antenna Type	Panel waveguide horn array	
Dimension	Φ1250mm×300mm	
Equivalent Diameter	600mm	
Weight	≤65kg	
Frequency Range	RX : 10.70 ~ 12.75GHz TX : 13.75 ~ 14.50GHz	
Gain	RX : 35.20dBi ( 12.50GHz ) TX : 35.60dBi ( 14.25GHz )	
Polarization	Linear	
Cross Pol Isolation	≥30dB	
Antenna Motion Range	Azimuth : 360°continuous rotation	Elevation : 10° ~ 90°
	Roll: ~	Pol: 360°continuous rotation
Track Mode	INS measurement and signal tracking	
Tracking Accuracy	≤0.2°	
Initial Acquisition	≤120s	
Re-Acquisition	block time ≤1 minutes, acquisition immediately	
	1 minutes < block time ≤10 minutes , acquisition ≤15s	
	block time > 10minutes , acquisition ≤30s	
Input Power	AC220V 50Hz , standard power consumption ≤220W	
Operating Temperature	-40°C ~ 65°C	